

DecoSplash – Installation Guide

Step 1: WALL PREPARATION - Ensure that the surface of the wall is sound, properly sealed and free of dust and dirt, flat and suitable for fixing DecoSplash splashback.

Step 2: MEASURING - Ensure that you take accurate measurements of the walls you will be installing DecoSplash onto.

Step 3: MARKING OUT - After measuring your wall for installation, your DecoSplash panel should be placed on a flat, clean and level surface. Use a tape measure and pencil to mark and measure the wall for your splashback panel.




Step 4: CUTTING - Double check all measurements before starting to cut the splashback. Use a circular saw for long cuts and a jigsaw for more detailed cut-outs.


Step 5: TEST FIT - Before applying any adhesives, complete a test fit of the splashback to ensure that it fits correctly. Trim the protective film edges so that the film is only attached to the face of the splashback.

Step 6: EDGE FINISHING - All cut edges can be filed using a fine edge

Step 7: APPLYING TAPE - It is recommended to use a 3.2mm thick 3M double sided tape to assist with benchtop tolerances (Lincoln Product Code: 4M-400-824). Apply the tape vertically along the cut panel approximately every 400mm. (as shown)

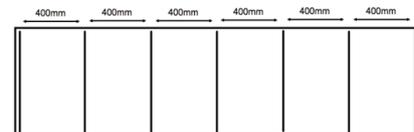

Step 8: APPLYING ADHESIVE - Apply a 6mm bead of high strength, water resistant construction adhesive - recommended to use the Dow Corning 680 Silicone (Lincoln Product Code: 2-152-831 white or 2-152-830 translucent) in a wavy pattern between each tape strip, as shown.

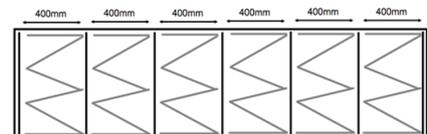

Step 9: PANEL SEALANT - Seal where the splashback meets other surfaces eg. benchtops or internal corners, with translucent wet area silicone.

Step 10: PANEL CLEAN UP - After the splashback is fitted and the adhesive is cured, remove the outer protective film or masking tape in one continuous movement to achieve the best finish. A warm water detergent can be used to wipe down finished panels to remove excess silicone.

Notes for power point installation

- The hole in the splashback for power points can be cut out by first using a 10 mm drill, and then cut out a rectangle using a jig saw with a metal blade (keep the protective plastic film on the splashback while cutting out with the job saw).
- Installation of power points on DecoSplash must only done by a licensed electrician.
- It is recommended that the licensed electrician earth the splashback by fixing an earth wire to the splashback, using a self-tapping screw or small screw and nut.

National Customer Service:

Ph: 1300 551 919

Fax: 1300 739 656

www.lincolnsentry.com.au

For locations please visit

<http://www.lincolnsentry.com.au/contact-us/locations>